

# **ProReact** Digital Fixed Temperature Linear Heat Detection Cable

## Data Sheet

---

Also known as

- **ProReact Digital Linear Heat Sensing Cable**
- **ProReact Digital LHD Cable**
- **ProReact Digital LHS Cable**

## Introduction

Thermocable ProReact Digital Linear Heat Detection Cable uses fixed temperature detection technology to provide an easy method for sensing changes in temperature levels. The cable can offer alternative overheating protection in a vast range of applications and environments, from tunnels, cable trays, warehousing to sensing changes in temperature within escalators and other applications where many risks of fire are hidden from view.

The digital linear heat detection cable can be directly connected to a single zone of a conventional fire alarm control panel, or, using an addressable zone/switch monitor, the digital linear heat detection cable can easily be interfaced to an addressable loop.

Digital linear heat detection cable is comprised of a pair of twisted low resistance, tri-metallic conductors, sheathed in advanced temperature sensitive polymers. When the cable reaches the required temperature the two twisted cores will fuse together, with a fire triggering resistor attached to the input interface and a single core of linear heat cable to activate an alarm at the main fire panel (see schematic).

## Digital Interface Monitor Module

A UL864 10th edition approved Digital Interface Monitor Module is available and provides additional benefits when used with the ProReact Digital LHD cable. It can simultaneously monitor up to two zones of LHD cable and has separate fault and alarm outputs for each zone. A built-in display shows the state of each zone, including the distance in meters and feet to the alarm point if an alarm is triggered. It also includes an RS-485 Modbus RTU output for integration with a PLC or SCADA system.

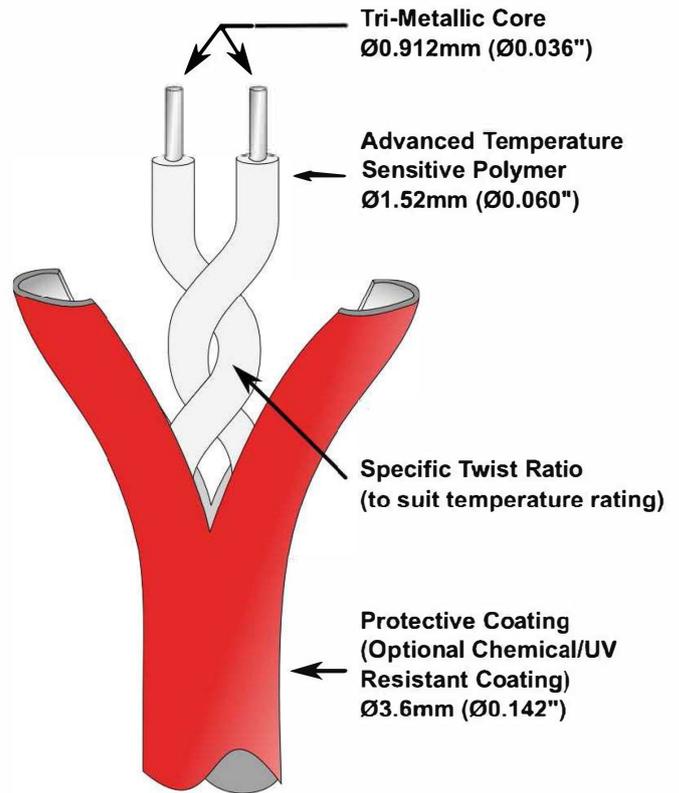


Figure 1: Fixed Temperature Linear Heat Detection Cable Construction

## Features

- cUL/UL 521 Approved (File No. S8976)
- FM Approved (Class 3210)
- CE Marked
- Up to 10,000ft (3000m) per zone
- Detection along the entire length of sensor cable
- Optional Nylon extrusion offering UV protection and increased durability for outdoor use
- Optional Polypropylene extrusion for increased chemical protection in caustic environments
- Optional stainless steel over-braiding for increased mechanical protection

## Detection Temperatures

- 68°C (155°F)
- 78°C (172°F)
- 88°C (190°F)
- 105°C (221°F)
- 185°C (365°F)

## Technical Data

<b>Construction:</b>	Overall insulated, twisted pair of tri-metallic cores
<b>Insulation:</b>	1kV tested protective outer coat
<b>Additional Insulation Options:</b>	Nylon, Polypropylene or Stainless Steel braiding
<b>Approvals:</b>	CE Marked, RoHS Compliant, FM, UL, GOSTR
<b>Maximum Zone Length:</b>	3,000m (10,000ft)
<b>Wire Overall Diameter:</b>	3.60mm to 5.08mm (0.142" to 0.200")
<b>Minimum bend radius:</b>	50 mm (2")
<b>Ambient Temperature Range:</b>	-40°C – 125°C (-40°F – 257°F) (dependant upon action temperature)

### Electrical

<b>Max Voltage Rating:</b>	30Vac, 42Vdc
<b>Resistance:</b>	~100Ω/km (29Ω/kft) per leg
<b>Velocity of Propagation:</b>	~55%
<b>Capacitance:</b>	88 – 150 pF/m (26 – 45 pF/ft)
<b>Inductance:</b>	540 – 1050 nH/m (165 – 320 nH/ft)

# Technical Specifications

## Electrical Specifications

Operating Voltage Range	0-30Vac, 0-42Vdc
Resistance	Approx 100Ω/km (30.4Ω/kft) per leg
Velocity of Propagation	Approx 55%
Capacitance	88 – 150pF/m
Inductance	540 – 1050nH/m

## Environmental Specifications

<b>Maximum ambient temperature</b>	
68°C, 78°C	45°C (113°F)
105°C, 88°C	65°C (149°F)
185°C	125°C (257°F)
Humidity	0% to 100% RH
<b>Minimum Operating Temperature</b> -40°C (-40°F)	

## Mechanical Specifications

Material	Overall insulated, twisted pair of tri-metallic cores
Colour	(additional nylon coating is always black) (additional polypropylene coating is transparent)
68°C, 78°C	Red
88°C, 105°C	White
185°C	Red
<b>Diameter (all)</b>	
PVC coating	3.60mm +/- 0.12mm (0.142" +/- 0.005")
...with additional Polypropylene coating	4.44mm +/- 0.12mm (0.175" +/- 0.005")
...with additional Nylon coating	4.50mm +/- 0.12mm (0.177" +/- 0.005")
...with additional Stainless Steel Braid	4.10mm +/- 0.12mm (0.161" +/- 0.005")
...with additional Nylon Coating & Stainless Steel Braid	5.08mm +/- 0.12mm (0.200" +/- 0.005")